

LINK TABLE

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Table

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

| | |
|-----------------------------|--------------------|
| Link Medium Table (Silver): | LINK MED TBL SLV |
| Link Medium Table (White): | LINK MED TBL WHT |
| Link Medium Table (Black): | LINK MED TBL BLK |
| Link Medium Table (Orange): | LINK MED TBL ORG |
| Link Medium Table (Green): | LINK MED TBL GRN |
| Link Small Table (Silver): | LINK SML TBL SLV |
| Link Small Table (White): | LINK SML TBL WHT |
| Link Small Table (Black): | LINK SML TBL BLK |
| Link Small Table (Orange): | LINK SML TBL ORG |
| Link Small Table (Green): | LINK SML TBL GRN |
| Link USB (White) | LINK USB |
| Link Small Surface Mount: | Special order only |
| Link Medium Surface Mount: | Special order only |

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

- 360° rotation at base
- Full-range height adjustability
- 180° front to back head tilt
- Advanced LED array eliminates multiple shadows
- Ships flat-packed
- OCC model available upon request

SPECIFICATIONS

- Voltage: 120-240V 50-60Hz
- Power Consumption: 7.5W
- Color Temperature: 3000K
- Luminosity: 350 Lumens
- Luminaire efficacy: 47 Lumens/Watt
- Color Rendition Index: 90 CRI
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS


| | | |
|------------------|---------|--------------------|
| Link Small: | 3.05LBS | 33" X 6.5" X 4.5" |
| | 1.4KGS | 84cm X 17cm X 11cm |
| Link Medium: | 3.25LBS | 33" X 6.5" X 4.5" |
| | 1.5KGS | 84cm X 17cm X 11cm |
| Link Table Base: | 7.65LBS | 12.5" X 12" X 4" |
| | 3.5KGS | 32cm X 30cm X 10cm |

NOTES

- Occupancy sensor model available upon request
- Custom requests can be considered on volume orders
- Link USB sold separately




FINISHES




DIMENSIONS


LINK MEDIUM TABLE




LINK SMALL TABLE




LINK USB PORT ADD-ON

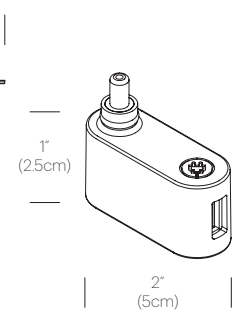

LINK MEDIUM SURFACE MOUNT

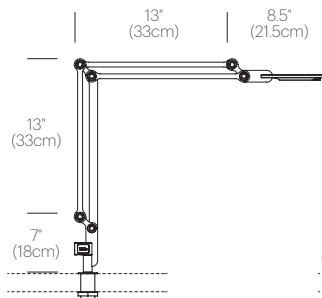

LINK SMALL SURFACE MOUNT

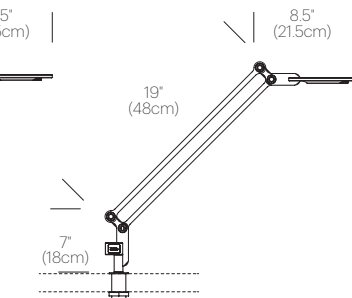

SURFACE MOUNT AVAILABLE FOR 2-12" (5-3cm) AND 1.2-3" (3-7.6cm) WORKSURFACES

LINK CLAMP

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Table

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

| | |
|-----------------------------|--------------------|
| Link Medium Clamp (Silver): | LINK MED CLP SLV |
| Link Medium Clamp (White): | LINK MED CLP WHT |
| Link Medium Clamp (Black): | LINK MED CLP BLK |
| Link Medium Clamp (Orange): | LINK MED CLP ORG |
| Link Medium Clamp (Green): | LINK MED CLP GRN |
| Link Small Clamp (Silver): | LINK SML CLP SLV |
| Link Small Clamp (White): | LINK SML CLP WHT |
| Link Small Clamp (Black): | LINK SML CLP BLK |
| Link Small Clamp (Orange): | LINK SML CLP ORG |
| Link Small Clamp (Green): | LINK SML CLP GRN |
| Link USB (White) | LINK USB |
| Link Small Surface Mount: | Special order only |
| Link Medium Surface Mount: | Special order only |

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

- 360° rotation at base
- Full-range height adjustability
- 180° front to back head tilt
- Advanced LED array eliminates multiple shadows
- Hi-low dim control
- Ships flat-packed
- OCC model available upon request

SPECIFICATIONS

- Voltage: 120-240V 50-60Hz
- Power Consumption: 7.5W
- Color Temperature: 3000K
- Luminosity: 350 Lumens
- Luminaire efficacy: 47 Lumens/Watt
- Color Rendition Index: 90 CRI
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS


| | | |
|--------------------|--------|--------------------|
| Link Clamp Small: | 3.4LBS | 33.5" X 7" X 4.5" |
| | 1.5KGS | 85cm X 18cm X 11cm |
| Link Clamp Medium: | 3.6LBS | 33" X 6.5" X 4.5" |
| | 1.6KGS | 84cm X 17cm X 11cm |

NOTES

- Occupancy sensor model available upon request
- Custom requests can be considered on volume orders
- Link USB sold separately




FINISHES




DIMENSIONS


LINK MEDIUM CLAMP

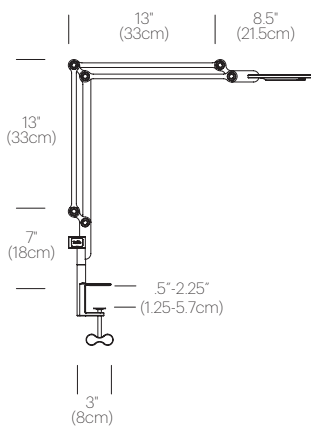


LINK SMALL CLAMP

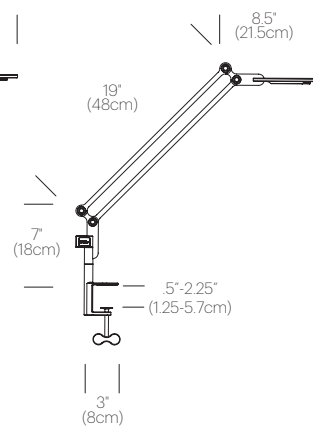


LINK USB PORT ADD-ON



LINK MEDIUM SURFACE MOUNT

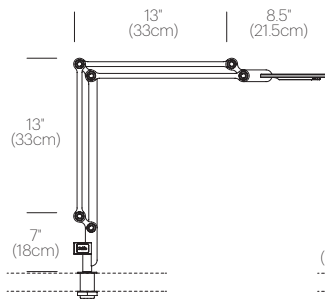

LINK SMALL SURFACE MOUNT

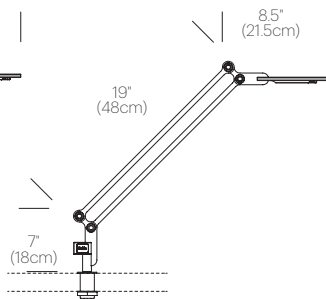

SURFACE MOUNT AVAILABLE FOR 2-1/2" (5-3cm) AND 1-2-3" (3-7.6cm) WORKSURFACES

LINK FLOOR

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Floor

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

| | |
|-----------------------------|------------------|
| Link Medium Floor (Silver): | LINK MED FLR SLV |
| Link Medium Floor (White): | LINK MED FLR WHT |
| Link Medium Floor (Black): | LINK MED FLR BLK |
| Link Medium Floor (Orange): | LINK MED FLR ORG |
| Link Medium Floor (Green): | LINK MED FLR GRN |
| Link Small Floor (Silver): | LINK SML FLR SLV |
| Link Small Floor (White): | LINK SML FLR WHT |
| Link Small Floor (Black): | LINK SML FLR BLK |
| Link Small Floor (Orange): | LINK SML FLR ORG |
| Link Small Floor (Green): | LINK SML FLR GRN |
| Link USB (White) | LINK USB |

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

- 360° rotation at base
- Full-range height adjustability
- 180° front to back head tilt
- Advanced LED array eliminates multiple shadows
- Ships flat-packed
- OCC model available upon request

SPECIFICATIONS

- Voltage: 120-240V 50-60Hz
- Power Consumption: 7.5W
- Color Temperature: 3000K
- Luminosity: 350 Lumens
- Luminaire efficacy: 47 Lumens/Watt
- Color Rendition Index: 90 CRI
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

| | | |
|------------------|---------|--------------------|
| Link Small: | 3.05LBS | 33" X 6.5" X 4.5" |
| | 1.4KGS | 84cm X 17cm X 11cm |
| Link Medium: | 3.25LBS | 33" X 6.5" X 4.5" |
| | 1.5KGS | 84cm X 17cm X 11cm |
| Link Floor Base: | 10.1LBS | 12.5" X 12" X 1.5" |
| | 4.6KGS | 32cm X 30cm X 4cm |

NOTES

- Occupancy sensor model available upon request
- Custom requests can be considered on volume orders
- Link USB sold separately




FINISHES




DIMENSIONS


LINK MEDIUM FLOOR

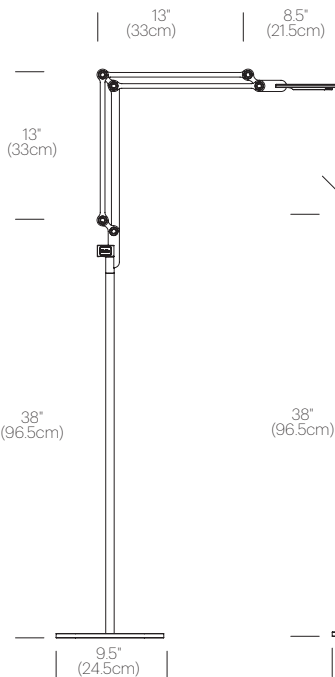

LINK SMALL FLOOR

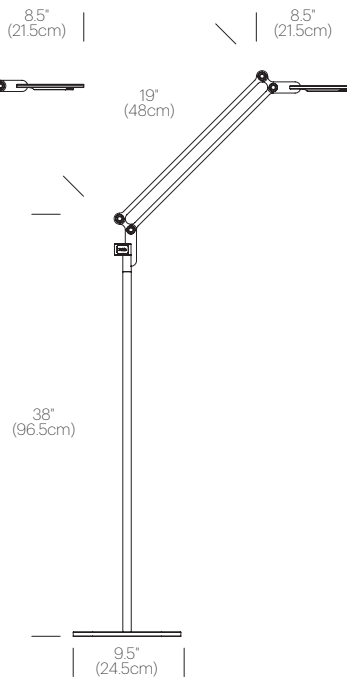

LINK USB PORT ADD-ON



LINK WALL

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Wall

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

| | |
|----------------------------|------------------|
| Link Medium Wall (Silver): | LINK MED WAL SLV |
| Link Medium Wall (White): | LINK MED WAL WHT |
| Link Medium Wall (Black): | LINK MED WAL BLK |
| Link Medium Wall (Orange): | LINK MED WAL ORG |
| Link Medium Wall (Green): | LINK MED WAL GRN |
| Link Small Wall (Silver): | LINK SML WAL SLV |
| Link Small Wall (White): | LINK SML WAL WHT |
| Link Small Wall (Black): | LINK SML WAL BLK |
| Link Small Wall (Orange): | LINK SML WAL ORG |
| Link Small Wall (Green): | LINK SML WAL GRN |
| Link USB (White) | LINK USB |

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

- 180° rotation at base
- Full-range height adjustability
- 180° front to back head tilt
- Advanced LED array eliminates multiple shadows
- Ships flat-packed
- OCC model available upon request

SPECIFICATIONS

- Voltage: 120-240V 50-60Hz
- Power Consumption: 7.5W
- Color Temperature: 3000K
- Luminosity: 350 Lumens
- Luminaire efficacy: 47 Lumens/Watt
- Color Rendition Index: 90 CRI
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

| | | |
|-------------------|--------|--------------------|
| Link Wall Small: | 3.4LBS | 33.5" X 7" X 4.5" |
| | 1.5KGS | 85cm X 18cm X 11cm |
| Link Wall Medium: | 3.6LBS | 33" X 6.5" X 4.5" |
| | 1.6KGS | 84cm X 17cm X 11cm |

NOTES

- Occupancy sensor model available upon request
- Custom requests can be considered on volume orders
- Link USB sold separately



FINISHES



WHITE



BLACK



SILVER




GREEN




ORANGE

DIMENSIONS

LINK MEDIUM WALL

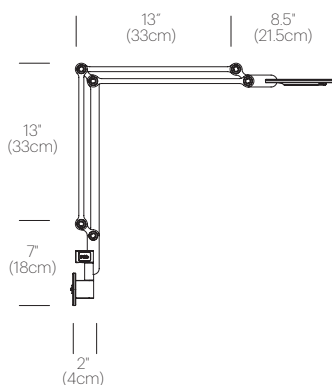

LINK SMALL WALL

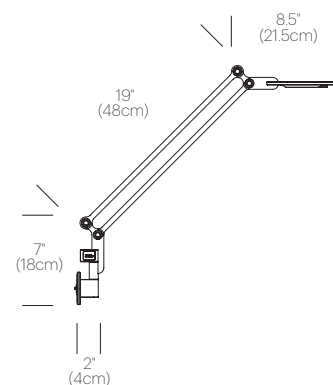

LINK USB PORT ADD-ON

