

# SOLIS DRUM 24/36

## DESCRIPTION

The new Solis Drum Pendant is the latest addition to the elegant Solis suspension family. Featuring a uniquely engaging blend of light and shadow, Solis Drum is made of laser cut polyester fabric combined with an aluminum top and bottom ring construction that allows the shade to hang under tension. Solis Drum also employs a stunning LED dome diffuser that spans across the full diameter of the top ring, radiating light down and sideways to cast shimmering warm patterns onto the space that surrounds it. The effect is a sense of weightlessness that invites a new kind of relationship with the light source. Perfect over a dining table, an entryway or in large groupings.

## FIXTURE TYPE

Pendant

## LIGHT SOURCE

High-output LED array

## LIGHT CONTROL

Hard-wired, dimmable

Compatible with TRIAC/ELV dimmers

(0-10V dimming available upon request)

Dali compatibility upon request

## FEATURES

Ships flat-packed

Full-range dim with ELV dimmers

Fire retardant polyester fabric

## SPECIFICATIONS

Voltage: 120-277V 50-60Hz

Power Consumption: 35W (24"), 80W (36")

Color Temperature: 2700K

Luminosity: 2500 Lumens (24"), 5600 Lumens (36")

Luminaire efficacy: 71 Lumens/Watt

Color Rendition Index: 90 CRI

50K hour lifespan

Cable length: 10' (305cm) (Field Cuttable)

## CERTIFICATIONS



## PRODUCT CODES

Solis Drum 24 (White):	SOLI DR 24 WHT
Solis Drum 24 (Black):	SOLI DR 24 BLK
Solis Drum 24 (Silver):	SOLI DR 24 SLV
Solis Drum 36 (White):	SOLI DR 48 WHT
Solis Drum 36 (Black):	SOLI DR 48 BLK
Solis Drum 36 (Silver):	SOLI DR 48 SLV

## PACKAGING WEIGHT AND DIMENSIONS

Solis Drum 24:	11LBS	26" X 26" X 6"
	5KGS	61cm X 61cm X 15cm
Solis Drum 36:	16.4LBS	38" X 38" X 8"
	7.5KGS	96.5cm X 96.5cm X 20.3cm

## NOTES

Custom requests can be considered on volume orders

3000K, 3500k and other color temperatures available upon request



## FINISHES



WHITE




BLACK






SILVER

## DIMENSIONS

SOLIS DRUM 24

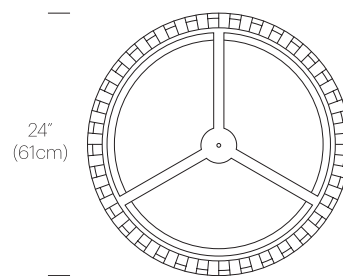


SOLIS DRUM 36

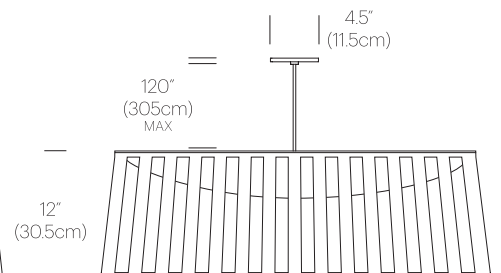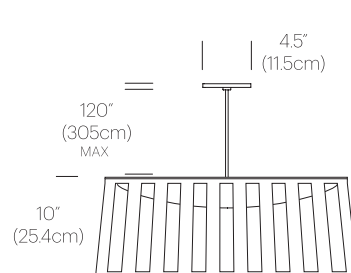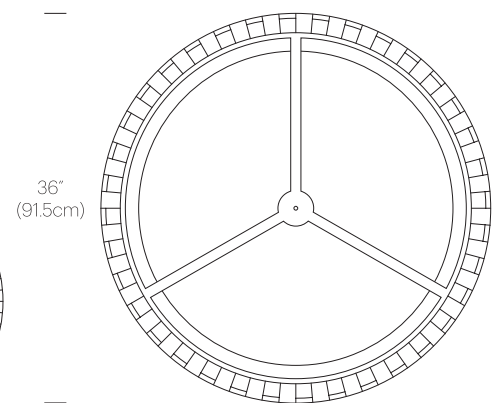

# SOLIS DRUM FLUSH 24/36

## DESCRIPTION

The new Solis Drum Pendant is the latest addition to the elegant Solis suspension family. Featuring a uniquely engaging blend of light and shadow, Solis Drum is made of laser cut polyester fabric combined with an aluminum top and bottom ring construction that allows the shade to hang under tension. Solis Drum also employs a stunning LED dome diffuser that spans across the full diameter of the top ring, radiating light down and sideways to cast shimmering warm patterns onto the space that surrounds it. The effect is a sense of weightlessness that invites a new kind of relationship with the light source. Perfect over a dining table, an entryway or in large groupings.

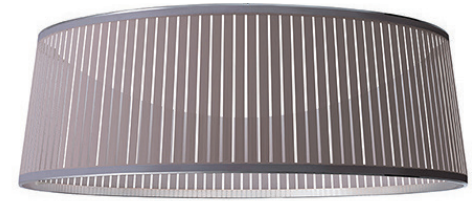

## FIXTURE TYPE

Ceiling

## LIGHT SOURCE

High-output LED array

## LIGHT CONTROL

Hard-wired, dimmable

Compatible with TRIAC/ELV dimmers  
(0-10V dimming available upon request)

Dali compatibility upon request

## FEATURES

Ships flat-packed

Full-range dim with ELV dimmers

Fire retardant polyester fabric

## SPECIFICATIONS

Voltage: 120-277V 50-60Hz

Power Consumption: 35W (24"), 80W (36")

Color Temperature: 2700K

Luminosity: 2500 Lumens (24"), 5600 Lumens (36")

Luminaire efficacy: 71 Lumens/Watt

Color Rendition Index: 90 CRI

50K hour lifespan

## CERTIFICATIONS



## FINISHES



WHITE



BLACK







SILVER

## DIMENSIONS

SOLIS DRUM 24

SOLIS DRUM 36

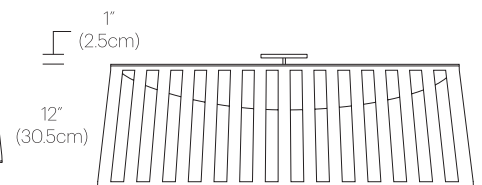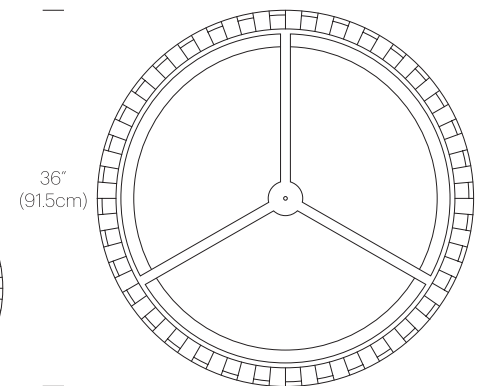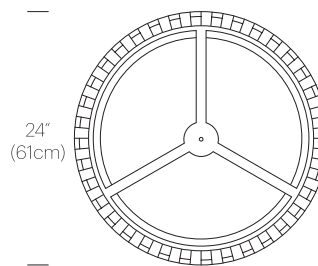

## PRODUCT CODES

Solis Drum 24 (White):	SOLI DR FSH 24 WHT
Solis Drum 24 (Black):	SOLI DR FSH 24 BLK
Solis Drum 24 (Silver):	SOLI DR FSH 24 SLV
Solis Drum 36 (White):	SOLI DR FSH 48 WHT
Solis Drum 36 (Black):	SOLI DR FSH 48 BLK
Solis Drum 36 (Silver):	SOLI DR FSH 48 SLV

## PACKAGING WEIGHT AND DIMENSIONS

Solis Drum 24:	11LBS	26" X 26" X 6"
	5KGS	61cm X 61cm X 15cm
Solis Drum 36:	16.4LBS	38" X 38" X 8"
	7.5KGS	96.5cm X 96.5cm X 20.3cm

## NOTES

Custom requests can be considered on volume orders

3000K, 3500k and other color temperatures available upon request